



Product Technical Specification

Boatspray 200D2F



Product Summary

The BOATSPRAY 200D2F is a portable diesel-powered dispersant pump unit for the application of Neat (Concentrated) or Diluted oil dispersant from Tugs, Offshore Support Vessels and other specialised Craft. It features a hand start diesel Pump Unit which can be supplied with an extensive range of options including Spraying Equipment such as Spray Arms, AFEDO™ Nozzles or Hand Lances. The Spraying Equipment is described in separate Technical Specifications and the options are listed below.

Options Available

1. Pump Unit Wheel Kit
2. Engine Spark Arrester
3. Engine Electric Start
4. Pump Unit PVC Cover
5. Pump Unit Lifting Sling
6. Recommended Spares
7. BS200-TS Aluminium System Container
8. Pump Spares Kit
9. Personal Protective Equipment (PPE)
10. UK Approved Dispersant
11. Portable 1000 litre Dispersant Tanks
12. Spray Arm, AFEDO and Hand Lance Spraying Equipment

More Info

Documentation

Operating Manuals

Quality Control

Manufactured under a
BS EN ISO 9001 Quality System

Pump Unit

Motive Unit:

Diesel Engine with Recoil Start

Pump:

Roller Type Positive Displacement
Pump, 220 LPM @ 4 bar

Pipework:

Gunmetal and Stainless Steel

Eductor:

Proportioning Type (0 -30%)

Flow Meter:

Dispersant Flow Rate indicator
Outlet Flow Rate Indicator (FRI)

Frame & Base Plate:

Stainless Steel

Valves (Manual):

Flow Control Valve
Dispersant Control Valve
Eductor Shut Off Valve

Pressure Relief Valve:

0 to 10 Bar setting

Pressure Gauge:

Dual Scale


Hoses:

5m Suction Hose with
Check Valve & Strainer
5m Dispersant Suction Hose

Shipping Specification

Supplied in Case

100cm x 75cm x 75cm
Gross Wt 135 kg

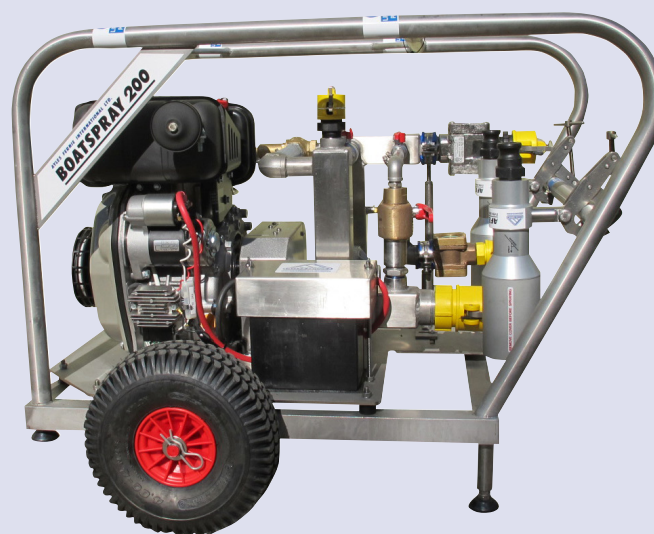

• email sales@darcy.co.uk • call 0800 0370 899